

PROVA[®]


PROVA 800

Multi-Input Thermometer/Datalogger



CE

K-type thermocouples: 1-meter

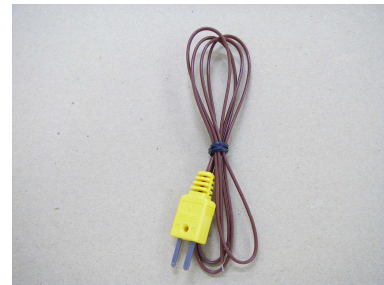

K-type thermocouples: 3-meter



Features:

- Analysis for thermal profile and thermal distribution.
- **8 input** temperature measurement/data logging (°C/°F)
- Graphic display of overall trend for each input
- **4.5" STN LCD** (240 x 128) with **backlight**
- Timers for the durations out of HI and LO limits
- Selection of **11 types** of thermocouple (K, J, E, T, R, S, N,...)
- Easy socket for thermocouple mini connector
- Basic accuracy 0.1% ± 1 °C (K type)
- Programmable **Hi-Lo alarm** for each input.
- Display of max and min values for each input
- **Sampling Rate** 8 Inputs / 1 second
- 24 Hour Recording with **Alkaline Batteries** of 2400mAH
- **Standard 2G** SD memory card (stores 3.8-year data)

- **Optional 8G** SDHC memory card
- SD card directly read by PC
- Easy data file management (Read and Delete functions)
- Built-in calendar clock
- Independent Input Setup (type of thermocouple, Hi-Lo alarm values, name of Engineering Unit)
- Isolated Input Protection of 350Vp-p between any two inputs
- **Programmable Engineering Unit** (E.U.) to integrate Analog Output (-60 to 60 mV) from instruments (e.g. Sound level meter, Humidity meter, Current adaptor)
- Screen **hardcopy** into files
- Paperless Recorder
- **Ready to use** package (Thermocouples, Memory Card, and Batteries etc.)

Electrical Specifications: (23°C±5°C)

Type	°C		°F	
	Range	Accuracy	Range	Accuracy
K	-200 ~ -150	±3.0°C	-328 ~ -238	±5.4°F
	-150 ~ -100	±2.0°C	-238 ~ -148	±3.6°F
	-100 ~ 999.9	±0.1% ±1.0°C	-148 ~ 999.9	±0.1% ±1.8°F
	1000 ~ 1370	±0.2% ±1.0°C	1000 ~ 2498	±0.2% ±1.8°F
J	-200 ~ -100	±2.5°C	-328 ~ -148	±4.5°F
	-100 ~ 100	±1.5°C	-148 ~ 212	±2.7°F
	100 ~ 999.9	±0.1% ±1.0°C	212 ~ 999.9	±0.1% ±1.8°F
			1000 ~ 1832	±0.2% ±1°F
E	-150 ~ -100	±2.0°C	-238 ~ -148	±3.6°F
	-100 ~ 760	±0.1% ±1.0°C	-148 ~ 999.9	±0.1% ±1.8°F
			1000 ~ 1400	±0.2% ±1°F
T	-200 ~ -150	±3.0°C	-328 ~ -238	±5.4°F
	-150 ~ -100	±0.1% ±1.5°C	-238 ~ -148	±0.1%±2.7°F
	-100 ~ 400	±0.1% ±0.5°C	-148 ~ 752	±0.1% ±0.9°F
R/S	0 ~ 100	±5.0°C	32 ~ 212	±9.0°F
	100 ~ 300	±3.0°C	212 ~ 572	±5.4°F
	300 ~ 999.9	±0.1% ±2.0°C	572 ~ 999.9	±0.1% ±3.6°F
	1000 ~ 1600	±0.1% ±2.0°C	1000 ~ 2912	±0.1% ±3.6°F
N	0 ~ 999.9	±0.1% ±1.0°C	32 ~ 999.9	±0.1% ±1.8°F
	1000 ~ 1300	±0.2% ±1.0°C	1000 ~ 2372	±0.2% ±1.8°F
L	-200 ~ 900	±0.1% ±1.0°C	-328 ~ 999.9	±0.1 % ±1.8°F
			1000 ~ 1652	±0.2 % ±1°F
U	0 ~ 600	±0.1% ±1.0°C	32 ~ 999.9	±0.1% ±1.8°F
			1000 ~ 1112	±0.2% ±1°F

B	600 ~ 999.9	$\pm 0.1\% \pm 2.0^{\circ}\text{C}$	1112 ~ 1831	$\pm 0.1\% \pm 3.6^{\circ}\text{F}$
	1000 ~ 1760	$\pm 0.1\% \pm 2.0^{\circ}\text{C}$	1832 ~ 3200	$\pm 0.1\% \pm 3.6^{\circ}\text{F}$
C	0 ~ 999.9	$\pm 0.1\% \pm 1.5^{\circ}\text{C}$	32 ~ 999.9	$\pm 0.1\% \pm 2.7^{\circ}\text{F}$
	1000 ~ 1760	$\pm 0.2\% \pm 1.5^{\circ}\text{C}$	1000 ~ 3200	$\pm 0.2\% \pm 2.7^{\circ}\text{F}$
mV	-10 ~ 60	$\pm 0.06 \text{ mV}$	-10 ~ 60	$\pm 0.06 \text{ mV}$
mV	-50 ~ -10	$\pm 0.1 \text{ mV}$	-50 ~ -10	$\pm 0.1 \text{ mV}$

General Specifications:

Battery Type:	1.5V AA alkaline batteries x 8
AC Adaptor:	DC Regulated 12V / 300mA output AC 110V or 220V Input
LCD	4.5" STN LCD (240 x 128)
Power Consumption:	100mA (with backlight); 70mA (without backlight)
Cold Junction Compensation Accuracy:	$\pm 0.5^{\circ}\text{C} / \pm 0.9^{\circ}\text{F}$
Temperature Coefficient:	0.01% of F.S. / $^{\circ}\text{C}$
Isolated Input Protection between any two inputs:	350Vp-p
Dimension:	257(L) x 155(W) x 57(H) mm 10.1" (L) x 6.1" (W) x 2.2" (H)
Weight:	1160g / 40.9oz (Batteries included)
Operation Environment:	$0^{\circ}\text{C} \sim 50^{\circ}\text{C}$, 85% RH
Storage Environment:	$-20^{\circ}\text{C} \sim 60^{\circ}\text{C}$, 75% RH
Accessories:	1.5V AA alkaline batteries x 8, AC power adaptor x 1, USB cable x 1, SD card (2GB) x 1, Carrying bag x 1, User manual x 1, Software CD x 1, Software manual x 1, K-type thermocouples ($-50 \sim 200^{\circ}\text{C} / -58 \sim 392^{\circ}\text{F} \pm 0.75\%$): 1-meter x 7pcs.; 3-meter x 1pc.
Options:	SDHC card (8GB, Maximum) Mini connector for analog Input Optical RS-232 to USB bridge

PROVA INSTRUMENTS INC.

Add: 6F-2, No. 129, Lane 235, Pao-Chiao Road, Shin-Tien District,
New Taipei City 23145, TAIWAN

Tel: 886-2-89191255

Fax: 886-2-89191489

E-mail: prova@ms3.hinet.net

Website: www.prova.com.tw